



Easyrig


Changing the Turtle X spring balancer

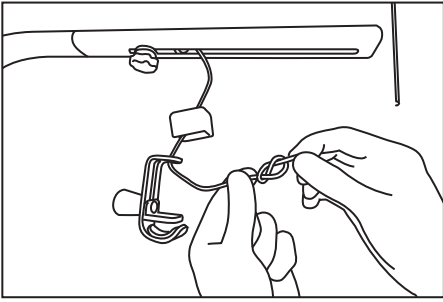


15. Drag the line through the hook cover and the hook and make a knot in the end.

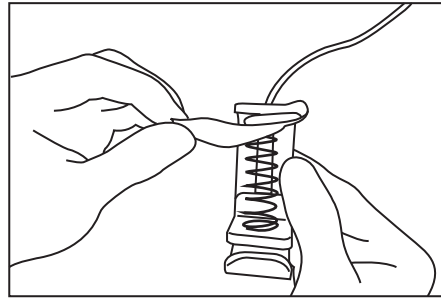

16. Apply black tape to cover up the knot.

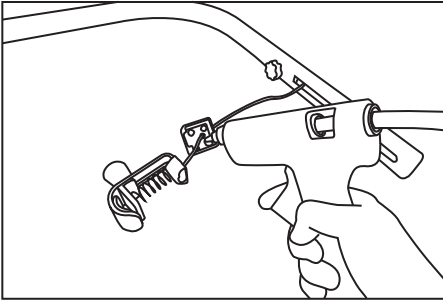


17. Apply glue inside the hook cover to make it stick to the hook.

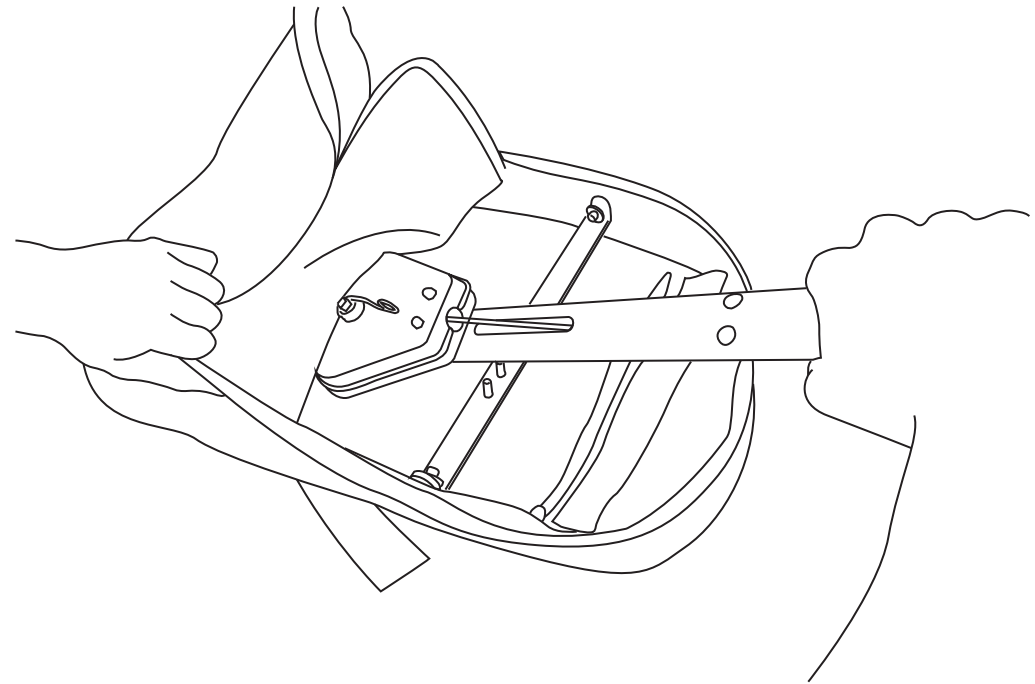


Tools that are needed:


- Screwdriver
- Hexagon keys 4 mm and 5 mm
- Universal screw spanner
- Spring cord tool

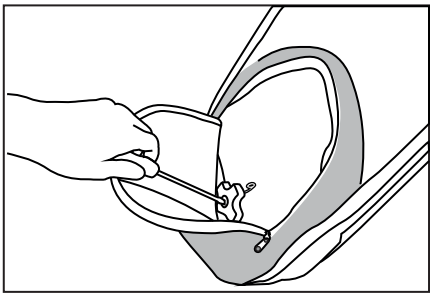


1. Remove the adjustment wheel with a screwdriver.

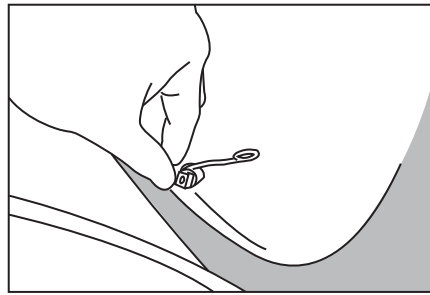


2. Pull the cloth over the adjustment spring.

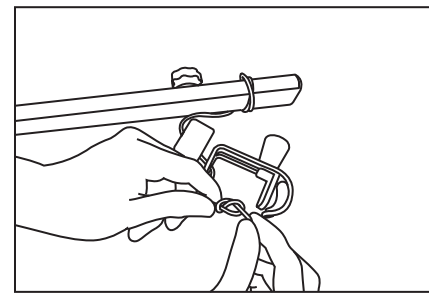


7. Remove the plastic cover on the camera hook and open the knob.

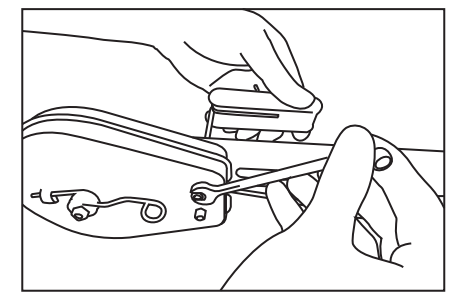


8. Remove the spring balancer by opening the M4 x 35 mm screw.

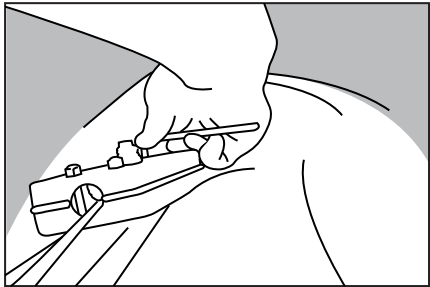


3. Hold on to the hex-headed screw inside the back pack.

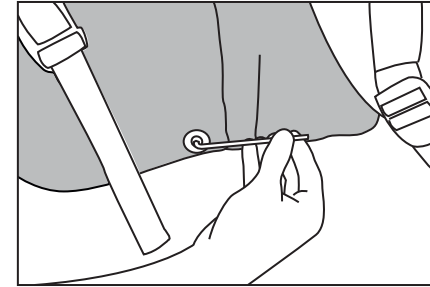


4. And remove the M6 x 40 mm hex headed screw.

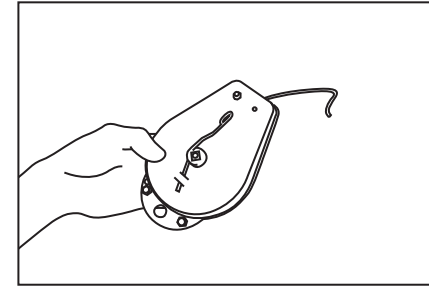


9. Put the new feather package in position.

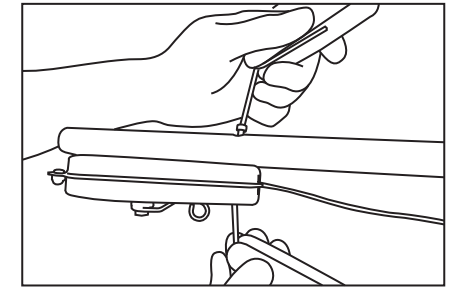


10. Inside the spring balancer is a loose wheel. It's important to have it in correct position. By using the hexagon you can keep the wheel in position.

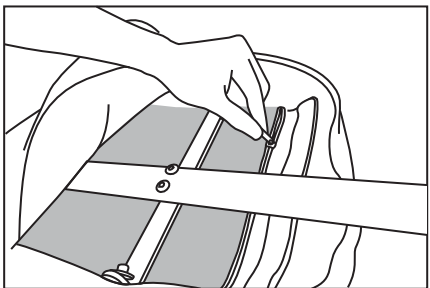


5. Fold up the velcro tape and open the zipper.

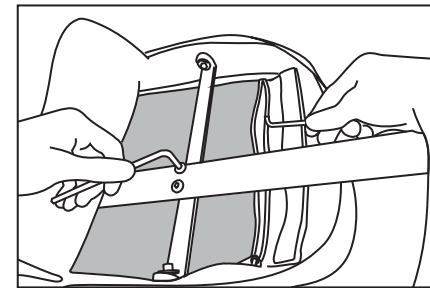


6. Remove the hex-headed screws, one key inside the back pack.

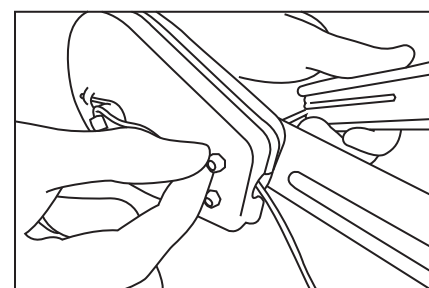


11. Mount the M4 x 35 screw. When the screw is through the nut it's perfect, otherwise the cover can bend.

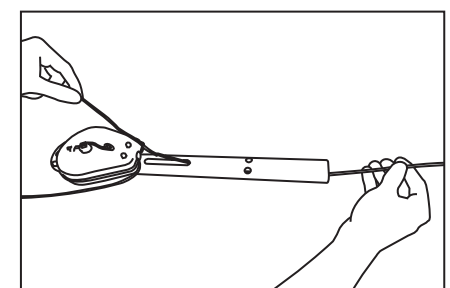


12. Mount the line through the arm by using the spring cord tool.

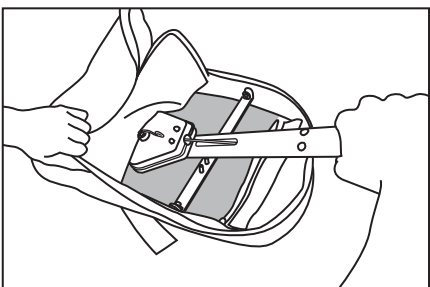

Now the support arm is free from the back pack and you can remove it.

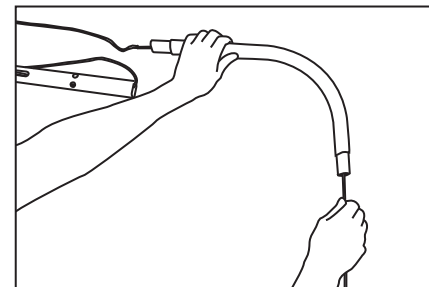

13. Mount the line through the bend arm over the wheels.

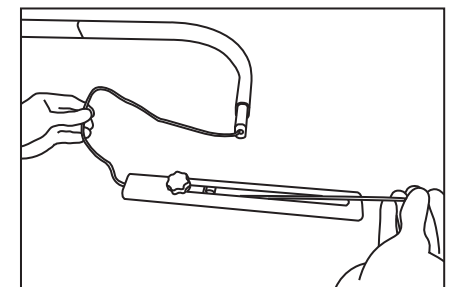

14. Mount the line through the adjustment block.